


8OWUDVRIW 5HFRYHU\ %ULGJH



3, 11, 1*


3, 1	'(6&5,37,21
	, Q S X V A A Q
	, Q S X V A A Q
	2 X W S X W \$ Q A R G H
	2 X W S X W & A W K R G H

) HDWXUHV
 ‡* OD 3 DVVLY 8 DWL 3 G F W L R Q
 ‡5HYH 9 R 10 W D J H 9
 ‡) R U Z D X G U H Q W
 ‡+ L J X U & X U U & H Q W E L O L W \
 ‡' H V L J Q R G X U I D R X \$ S S O L F D W L R Q
 % H Q H I L W V
 ‡ & D V H .
 ‡ 7 H U P L G R O G H 3 B B 0 H 6 7'

0D[LPXP 5DWLQ 00G H F W E K B D O F W H U L V W L F V


5DWLQ V f & D P E W H P S H U D Q D X U M K H U Z S H F L I L H G
 6LQJOH SKDVH K Q U H Z D V M U Q G X F O R D G H E D S D F L W E X H U C R O W H

3DUDPHWHU	6\PEROV	: 5 * % 3	8QLWV
0D[LPXP 5HSHWLWLYH 3HDN 5 9506	5 9506	VH 9ROWDJH	9
0D[LPXP 506 YROWDJH	9506		9
0D[LPXP '& %ORFNLQJ 9ROWDJH		9 &	9
\$YHUDJH 5HFWLILHG 2XWSXW &RUUHQW			\$
5HYHUVH 5HFRYHU\ 7LPH ,) \$,5 \$,55 \$	7UU		XV
3HDN)RUZDUG 6XUJH &XUUHQW +DOI 6LQH :DYH 6XSHULPSRV, H G R Q 5DWHG /RDG -('(& 0HWKRG		PV 6LQJOH H G R Q 5DWHG	\$
, WUDW E O X V L Q B V W P V	, W		\$ 6
0D[LPX)RUZDUG WDW H \$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$		f & f &	\$
7\SLFDO -XQFWLR Q 18DVA D FLWD Q & M H			S)
2SHUDWLQJ DQG 6WRUDJH 7H P S T W D W X U H 5DQJ H a			f &
1RWH0HDVX D M G +] D Q G S S O L H H Y H Y R G H V R D J H & 0RXQWHG RQ JODVV HSR\ \ 3' E'R(DUG< ZLWKP) FRSSHU SDG			

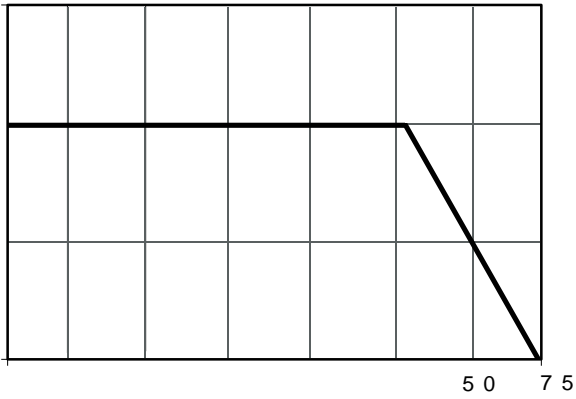


Case Temperature (°C)

Current Derating, Case

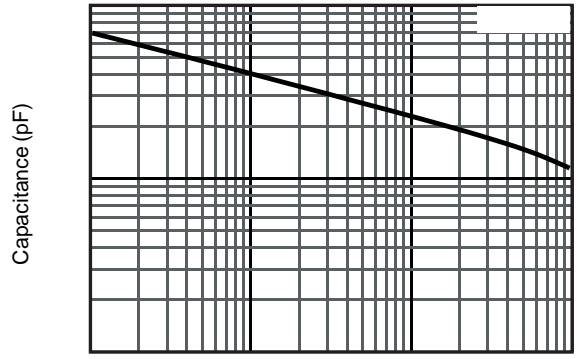

Reverse Voltage (V)

Typical Junction Capacitance

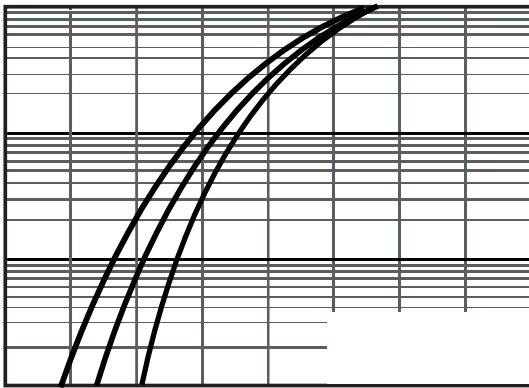


Forward Voltage (V)

Typical Forward Voltage

Reverse Current (A)

Typical Reverse Current

3 \$ & . \$ * (2 8 7 / , 1 (' , 0 (1 6 , 2 1 6

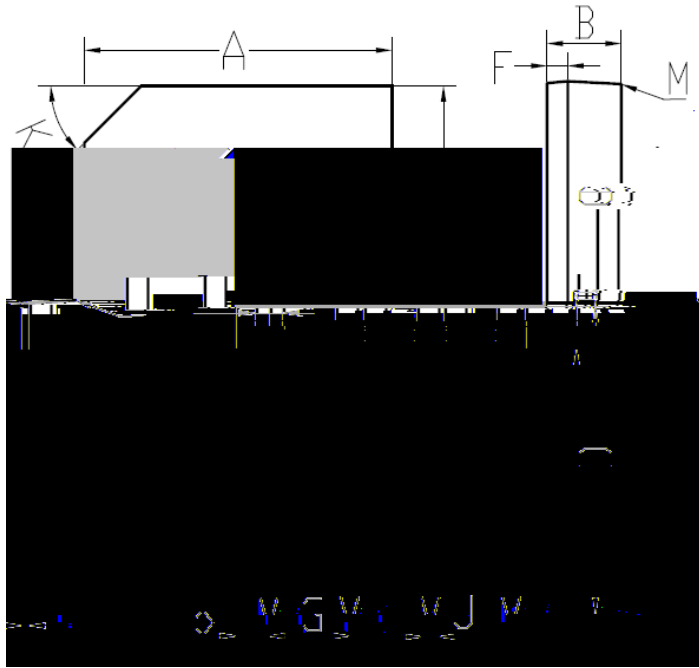

' , 0	0 , 1	0 \$;
\$		
%		
&		
'		
G		
(
)		
*		
+		
,		
-		
.	[f	5 Z Q
/		f
0		f
\$ 0 0 ' L P H Q V L R Q V L Q P L O D L P H W H U		