




: 5 * % /

8OWUDVRIW 5HFRYHU\ %ULGJH



3, 11, 1*

3, 1	'(6&5,37,21
	, Q S X V A A Q
	, Q S X V A A Q
	2 X W S X W A Q R G H
	2 X W S X W A W K R G H

) HDWXUHV
 ‡* OD V DVVLYY DWLSC F W L R Q
 ‡5HYHURD WDJH9
 ‡)RUZDUG UHGW
 ‡+LJGXU &XUUHQW DELOLW\
 ‡'HVLJQRGXUIDRKS/SOLF DWL R Q
 % Q H M L W
 ‡ & D V H % /
 ‡ 7 H U P L G R O G H B B O H 6 7'

0D[LPXP DWL Q Q G O H F W E K B D O F W H U L V W L F V

5DWLQWV &DPELWGHV SHUDWUWKHUZSHFLILHG
 6LQJJOH SKDVH KQIHZDVRUQGXFORVDSDFLWEXHUORVWH


3DUDPHWHU	6\PEROV	: 5 * % /	8QLWV
0D[LPXP 5HSHWLWLYH 3HDN 5954DU VH 9ROWDJH	9506		9
0D[LPXP 506 YROWDJH	9506		9
0D[LPXP '& %ORFNLQJ 9ROWDJH &			9
\$YHUDJH 5HFWLILHG 2XWSXW &XUUHQW			\$
5HYHUVH 5HFRYHU\ 7LPH ,) \$,5 \$,55 \$	7UU		XV
3HDN)RUZDUG 6XUJH &XUUHQW PV 6LQJJOH +DOI 6LQH :DYH 6XSHULPSRV, HGO R Q 5DWHG /RDG -('(& 0HWKRG			\$
, WUDWROXVVLQBV W PV	, W		\$ 6
0D[LPX)RUZDUG WDW H\$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ f & DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$ f &			\$
7\SLFDO -XQFWLRQ &DSD FLWD Q&MH			S)
2SHUDWLQJ DQG 6WRUDJH 7HPSW D W X U H 5 D Q J H			f &
1RWH0HDVX D H G +] D Q G S O L H H Y H U R G H R D J H &			

: 5 * % / 5HY


:RUOG , Q W H & J Q L D W L F L Q D H G

: 5 * % /


5 \$ 7 , 1 * 6 \$ 1 ' & + \$ 5 \$ & 7 (5 , 6 7 , & 6 & 7 5 9 (6 X Q O H V V R W K H U Z L V H Q R W H G

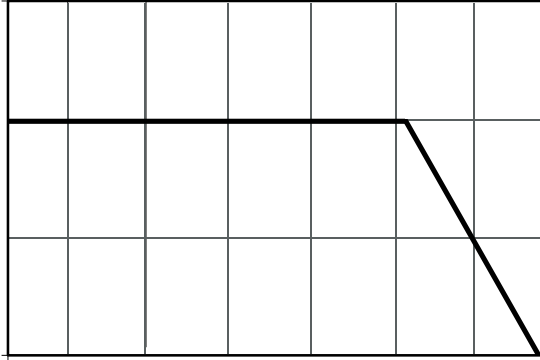

Current Derating, Case

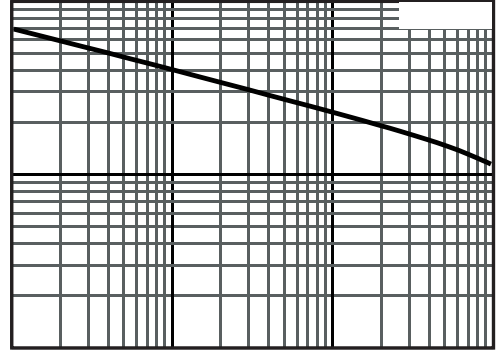

Typical Junction Capacitance

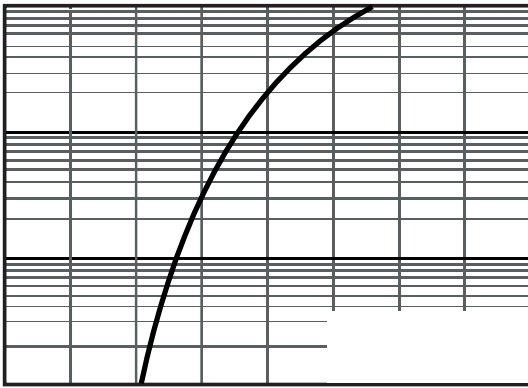

Typical Forward Voltage

Typical Reverse Current

