

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD

TSA 9



Cathode ← Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡ )UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULPSQNDVGRSGLRGH		,) 60		\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFVCHUPDO USHVULVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRDUZDUG SHGLRGH	,) \$	7- f&	7 < 3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHQWRCVH UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$



1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7\$

QVVRWUZVHRWG

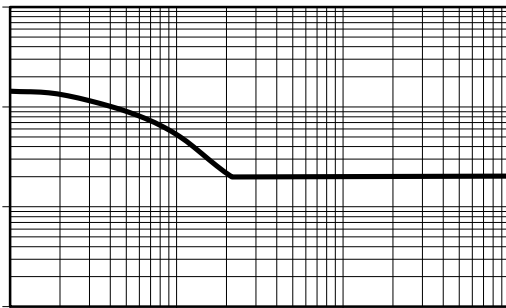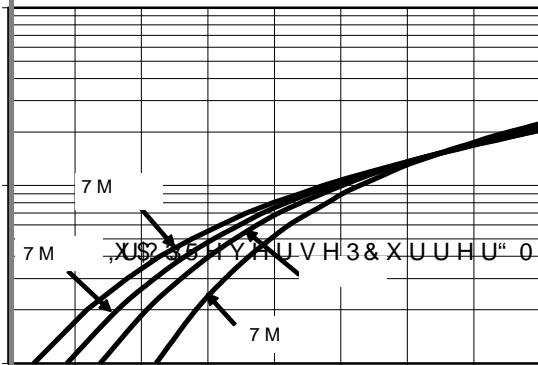


76\$ 9 5HY

:RUOG ,QWH&JQLDMLFRLOWHOG

76\$ 9

## PACKAGE OUTLINE DIMENSIONS

DO-201AD

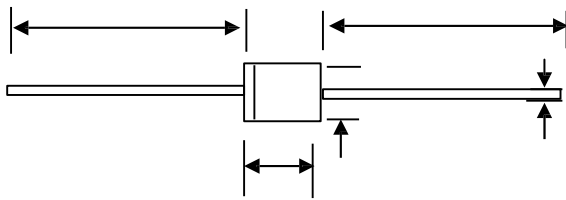


DO-201AD mechanical data

UNIT		A	B	C	D
mm	max	26.5	9.5	1.4	5.3
	min	24.5	7.3	1.1	4.8
mil	max	1043.30	374.01	5.1	208.67
	min	946.57	287.40		188.97

0DUNLQJ ,QIRUPDWLRQ


Cathode



\$QRGH

73URGXFW PQRGH


83' & LQIRUPDWLRQ

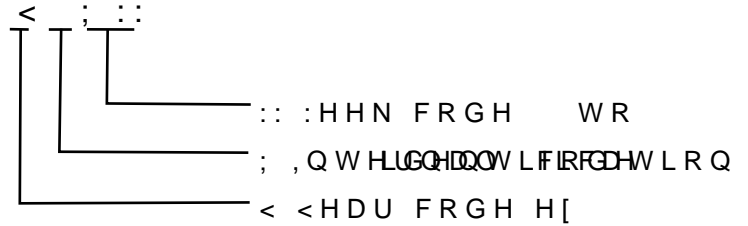

DWU ] b [ ' =bZcf aUh] cb

% =bg] XY 6cl

&' G hg] XY 6cl

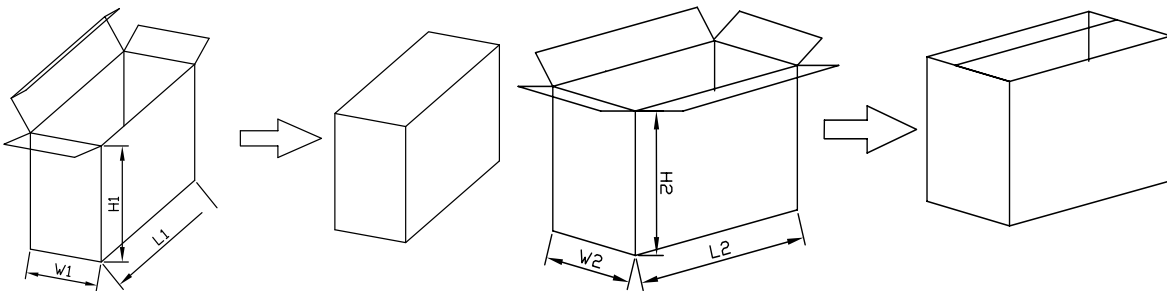

DWU ] b [ ' =bZcf aUh] cb

BC	I B=H	=bg] XY6cl			G hg] XY 6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
		&)	+) )	%4Í	4FÍ	Gí€	HG€
ÛVŸ	ÛÔÙ	Ù { æ  ^ • ç } æ & \ æ * ^ É F € € € Û Ô Ù ð & æ ! c [ } Á			F € € € € Û Ô Ù ð & æ ! c [ } É F € à [ ç ^ • á } Á c [ ç æ ]		
P [ c ^	V [   ^ i æ } & ^	m G € { { É t H { { L G F É F € € { { É t Í { { L F € F É Í € € { { É t F € { {					