


Trench MOS Barrier Schottky Rectifier

TSP12L100SP

TO-277



Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

Parameter		Symbol	Limit		Unit
Maximum repetitive peak reverse voltage		VRRM	100		V
Maximum average forward rectified current		IF(AV)	12		A
Peak forward surge current 8.3 ms single half sine- wave superimposed on rated load per diode		IFSM	200		A
Operating junction and storage temperature range		TJ, TSTG	-55 to +150		°C
Typical thermal resistance per diode(Mounted on FR-4 PCB)		R _{JC}	72		°C/W
Instantaneous forward voltage per diode			TYP.	MAX.	V
	IF=2A	TJ=25°C	0.4	0.49	
	IF=2A	TJ=125°C	0.4	-	
	IF=12A	TJ=25°C	0.6	0.7	
	IF=12A	TJ=125°C	0.6	-	
Instantaneous reverse current per diode at rated reverse voltage		TJ=25°C	20	80	uA
		TJ=125°C	-	20	mA

Notes:



(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≦ 40 ms



TSP12L100SP

09-NOV-2014

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

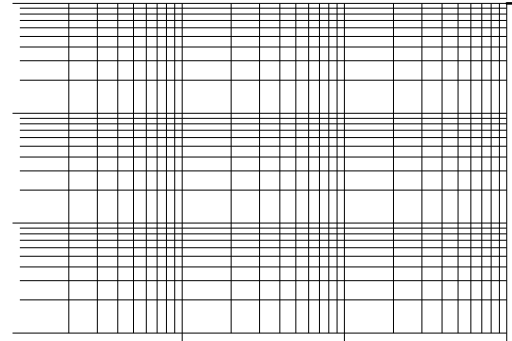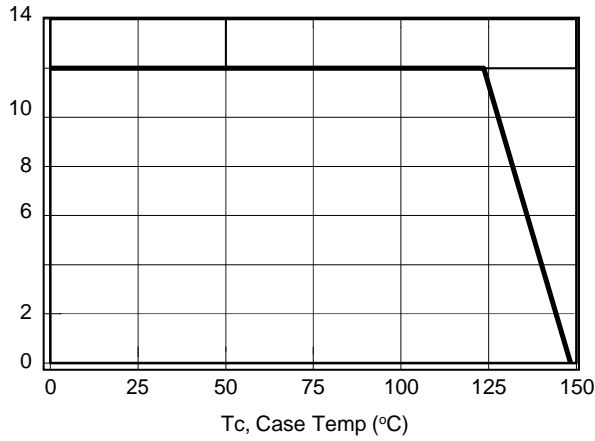


Typical Junction Capacitance

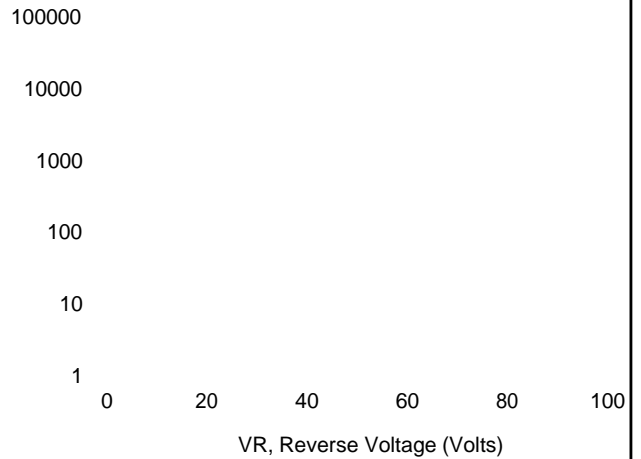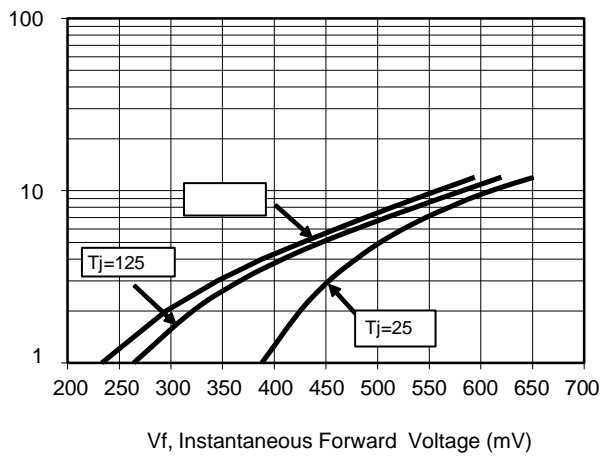

TSP12L100SP

09-NOV-2014

PACKAGE OUTLINE DIMENSIONS

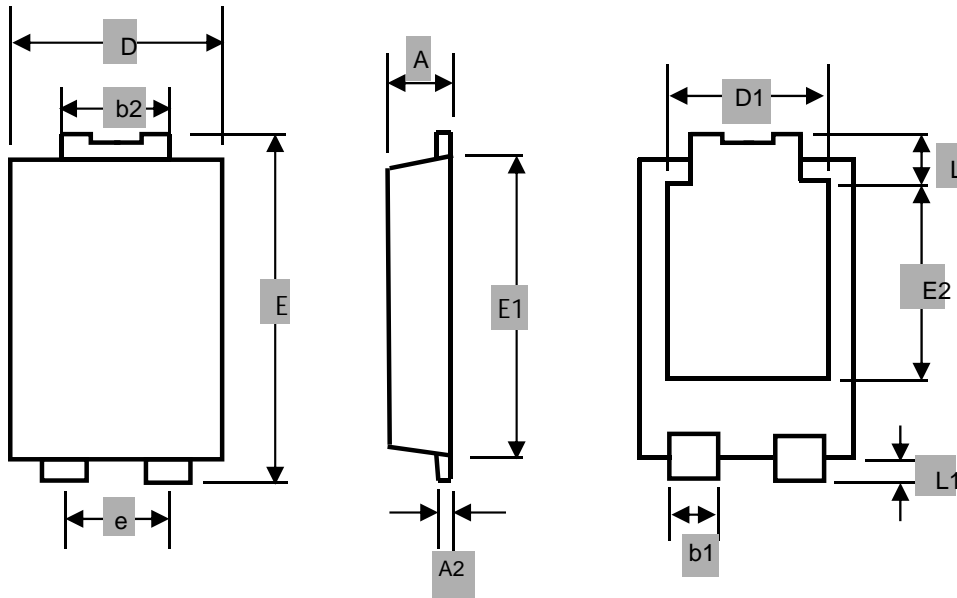

TO-277 mechanical data

UNIT		A	A2	b1	b2	D	D1	E	E1	E2	L	L1
mm	max	1.3	0.4	1.0	1.9	4.3	3.05	6.6				
	min											
mil	max	51.18	15.75	39.37	74.80	169.3	120.0	259.8				
	min											


TSP12L100SP

09-NOV-2014

Marking Information


Product model :TSP12L100SP Referred to as 12L100

PDC information

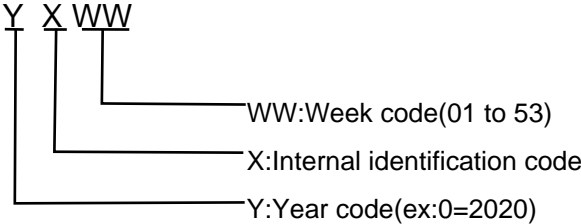


Packaging Information


1.Reel Dimensions



2.Inside Box



3.Outside Box

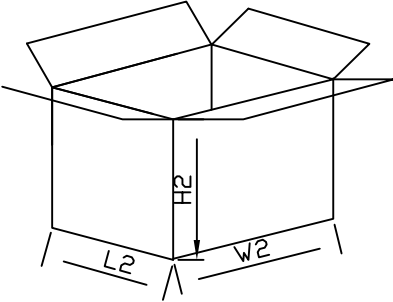

Packaging Information